

L5208F


EK0506-0004 Ver.F



PIN Diode

■ FEATURES

- Suitable for Antenna Switches in Portable Two-way Radios.
- Very Low Series Resistance
0.45Ω Typical @ IF=10mA, f=100MHz
- Low Capacitance
- RoHS Compliant
- Lead Free/ Halogen Free

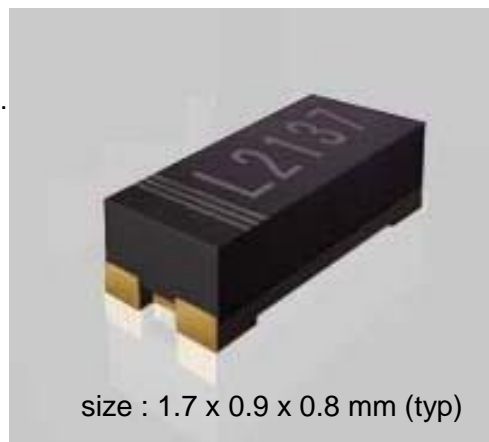

size : 1.7 x 0.9 x 0.8 mm (typ)

■ MECHANICAL DATA

- Case : SOD-523F (0603) standard package molded plastic.
- Terminals : Gold plated, solderable per MIL-STD-750, method 2026.
- Polarity : Indicated by cathode band.

■ ABSOLUTE MAXIMUM RATINGS (Ta=25°C)

SYMBOL	PARAMETER	RATING	UNITS
VR	Reverse Voltage	35	V
Pd *	Power Dissipation	300	mW
Tj	Junction Temperature	150	°C
Tstg	Storage Temperature Range	-55 to 150	°C

*) Mounting on glass epoxy PCB (50mm x 50mm x 1.6mm)


■ ELECTRICAL CHARACTERISTICS (Ta=25°C)

SYMBOL	PARAMETER	CONDITIONS	LIMITS			UNITS
			MIN	TYP	MAX	
IR 1	Reverse Current	VR = 35V	-	-	10	μA
IR 2	Reverse Current	VR = 25V	-	-	100	nA
VF	Forward Voltage	IF = 10mA	-	-	1.0	V
Rfs	Forward Series Resistance	IF = 10mA, f = 100MHz	-	0.45	0.70	Ω
CT	Diode Capacitance	VR =20V, f = 100MHz	-	-	0.9	pF

L5208F


EK0506-0004 Ver.F

MARKING INFORMATION




L2 : Parts number L5208F
XXX : Lot code (3~4digits)

PACKAGE OUTLINE INFORMATION

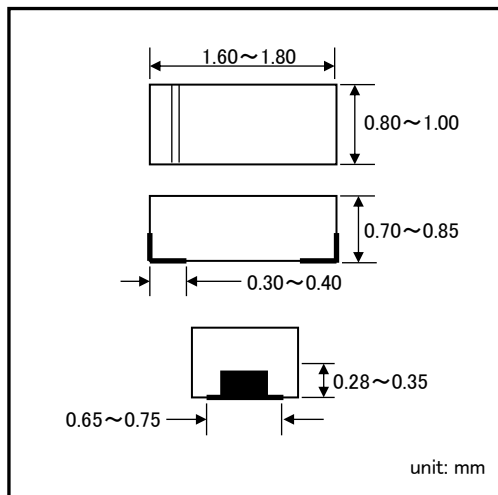

SUGGESTED PAD LAYOUT




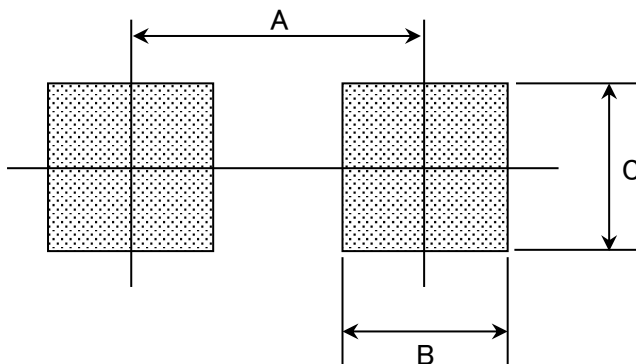


Size	SOD-523F
A	1.7
B	0.6
C	0.8
unit	mm

L5208F

EK0506-0004 Ver.F

■ TYPICAL PERFORMANCE CHARACTERISTICS

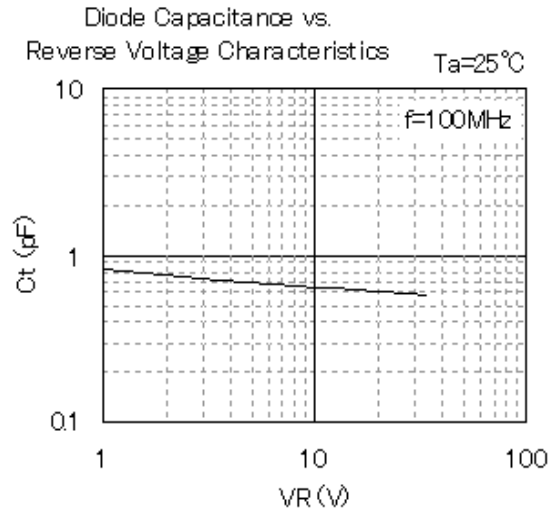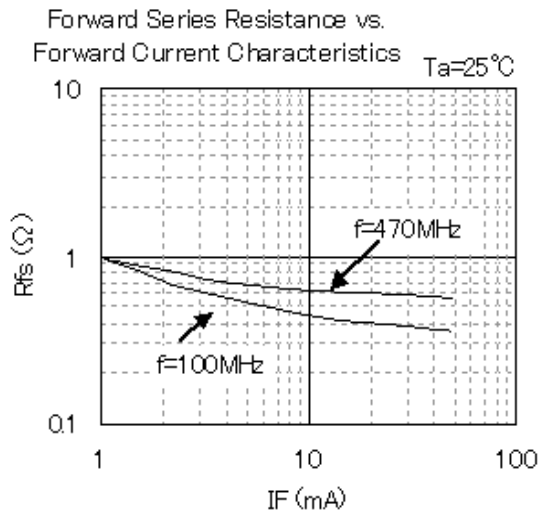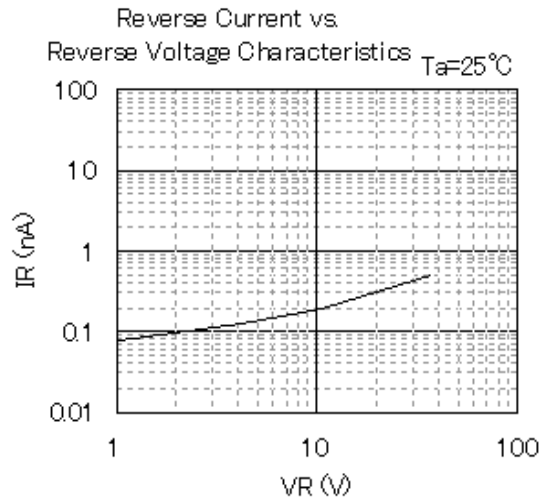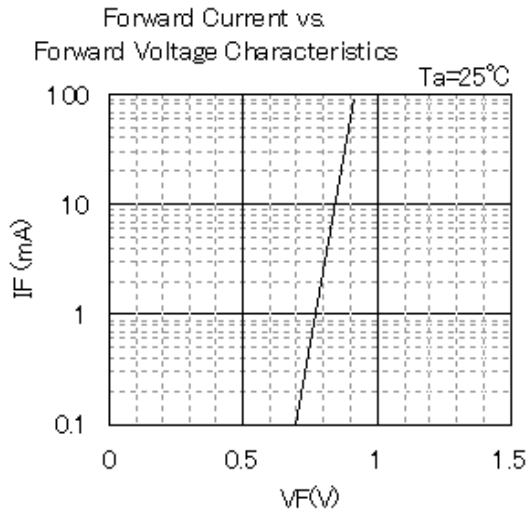

IMPORTANT NOTICE

Litec Corporation reserves the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes.

Litec Corporation does not assume any liability arising out of the application or use of any product described herein;

neither does it convey any license under its patent rights, nor the rights of others.

The user of products in such applications shall assume all risks of such use and will agree to hold Litec Corporation and all the companies whose products are represented on our website, harmless against all damages.

The products located on our website at www.litec-corp.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Litec Corporation.

CONTACT



Litec Corporation

Funakoshi Medical Building, Nakagyo-ku, Kyoto 604-0866, Japan

TEL : 81-75-211-6448 FAX : 81-75-211-6449

URL : <http://www.litec-corp.com/>